







Stamping Machine

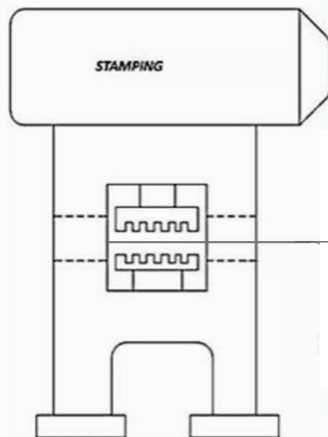


GTron

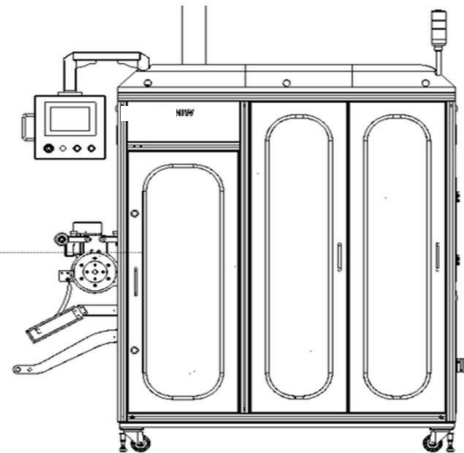

Winding Machine


GTron is an in-line, machine-vision based inspection system for the optical gauging of critical dimensions of stamped terminals. The system uses advanced image processing algorithms to provide accurate measurements. High-end industrial optics in conjunction with robust mechanical design enables the system to capture sharp, high-resolution images of the terminals. The system stops both the stamping machine and the winding machine when a defective terminal is detected.

- ✓ 100 percent inspection
- ✓ Scale up production to any type of terminal at required spm
- ✓ Early detection of wear on stamping-press die
- ✓ Real time data analytics and report

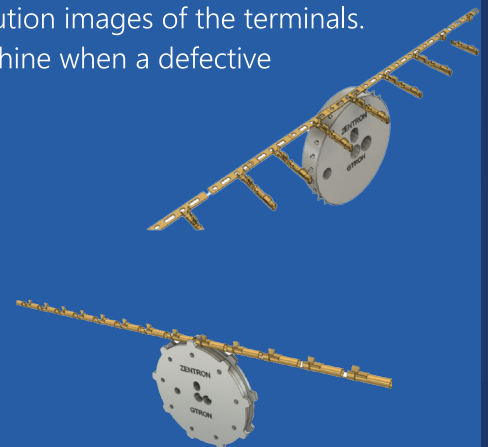


Failed Part Tracking


When a part fails, it is moved out of the vision area to a location where it can be easily accessed by the operator. The operator can then remove the faulty part and continue production, ensuring that the reel remains free of defects.

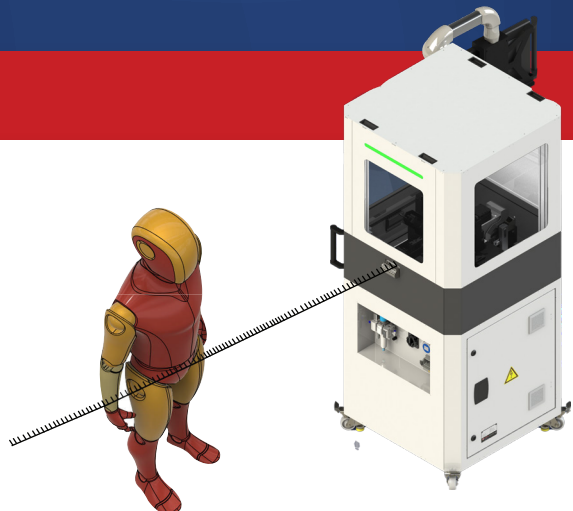

Multi-Camera User Interface

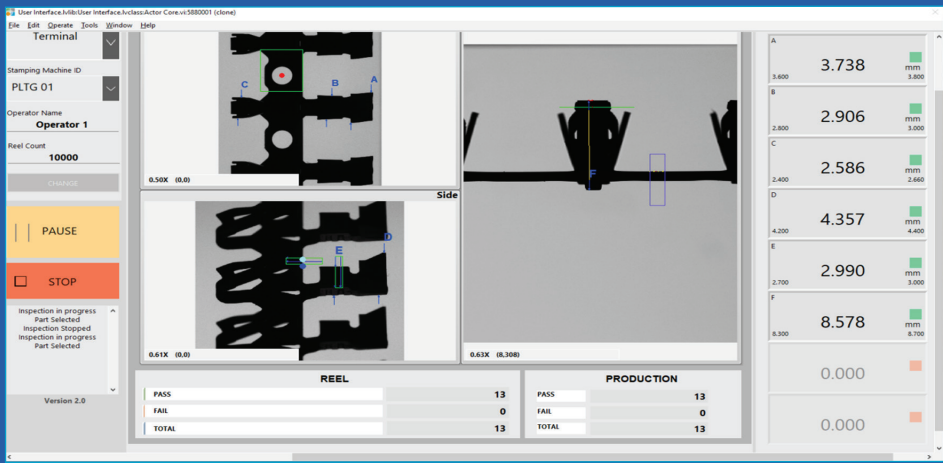

The system can support up to three cameras, enabling a 3D inspection of a terminal. The multi-camera view allows the operator to observe all the measurements of a terminal in real time.

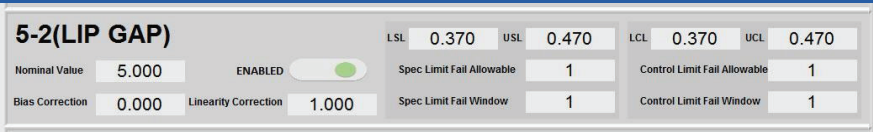

Operator can edit the tolerances, 'fail allowable' limits, enable/disable measurements and modify linearity & bias Values.


Inspection Data & Report

The system compiles measurement values and part images to generate part and batch reports. The recorded data can be stored and accessed from the cloud, allowing access from anywhere at any time.








Real-Time Data Analytics

The system calculates Cp / Cpk, averages and trends with graphical representation. This assists in tracking the production process and detecting issues, variances & defects in real-time.

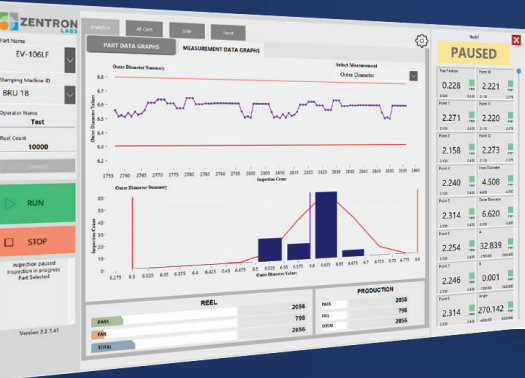

Dimensions

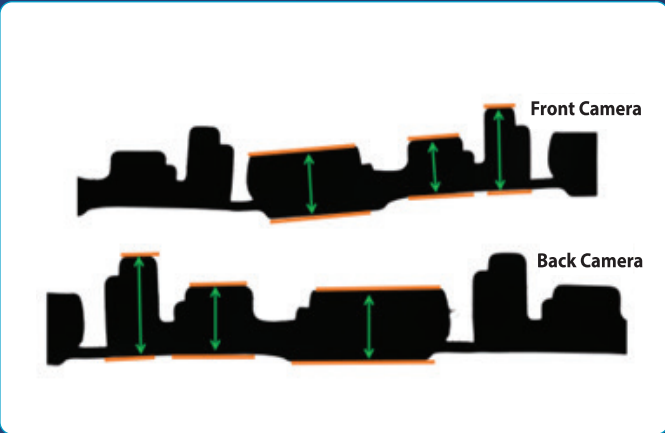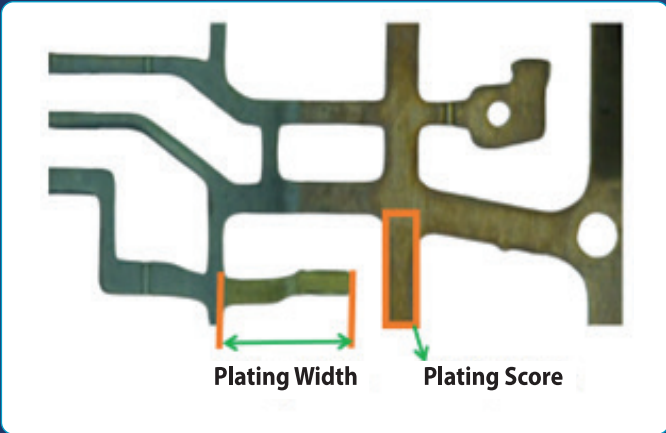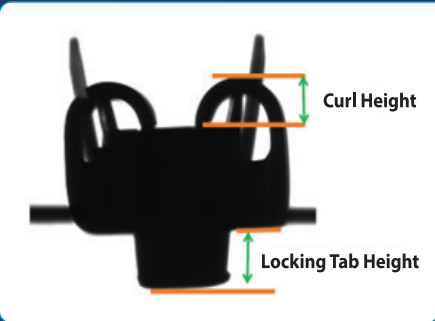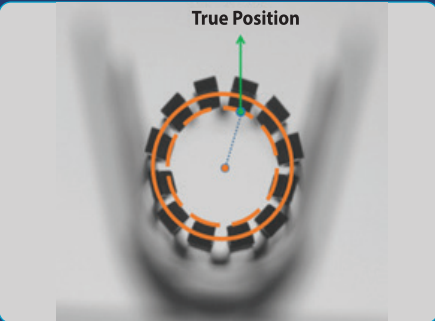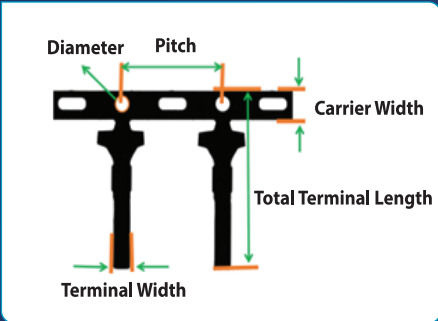

Metrics	GT-SR-3-048-SF	GT-SR-3-064-SF	GT-SR-1-80-SF	GT-SR-1-100-SF
Throughput(Parts/min)	Up to 2000 PPM	Up to 2000PPM	Up to 1200 PPM	Up to 1000 PPM
No. of Camera	Up to 3	Up to 3	Configurable	Configurable
No. of Parts & Measurement	Configurable	Configurable	Configurable	Configurable
Object FOV	Up to ~30X25mm	Up to ~45X30mm	Up to ~60X45mm	Up to ~75X50mm
Camera Resolution	1.3 MP	3 MP	5 MP	9.1 MP
Accuracy	15 μ m	15 μ m	20 μ m	20 μ m
Repeatability	10 μ m	10 μ m	10 μ m	10 μ m